

PRODUCT SPECIFICATIONS

CDVR42(7) and CDVT42(7) Direct Vent Systems



GLASS VIEWING AREA

33-1/16" W x 20-3/8" H (672 Square Inches)


TECHNICAL INFORMATION

- Max. Btu Input: 24,000 BTU/HR
- Ignition System: Standing Pilot or Electronic
- Gas Type: Natural or LP
- Flue Type: 4" x 7" Twist-Lock*
- Termination: Rear or Top Vent models
- Clearance to Flue for Interior: 3" Top, 1" Bottom and Sides**
- Clearance to Flue for Outside Wall: 1"
- Clearance to Fireplace: Zero Clearance
- CSA Design Certified


FIELD INSTALLED ACCESSORIES

- Louvers: Polished Brass, Pewter
- Curved Trim: Brass, Pewter, Black
- Medium Trim Kit: Brass, Pewter, Black
- Variable Thermostat Controlled Forced Air Blower (160 cfm) – BLOT
- Tavern Brown firebrick (FBCD(R/T)42TB)
- Natural Gas Conversion Kit (CDV42CKN)
- LP Gas Conversion Kit (CDV42CKP)
- Mesh Glass Cover
- Ambient Technologies™ Remote Controls and Thermostats
- Wood Cabinet Surrounds
- Designer Facings
- Current 500DVB trim and facing accessories will fit this unit.


* Simpson Dura-Vent is approved for Top Vent Applications with (MSPA) Adapter.
 ** If vertical rise is 7-1/2 feet or higher when in top vent configuration only (CDVT), the vent clearance to combustibles is 1" on all sides of the horizontal run.

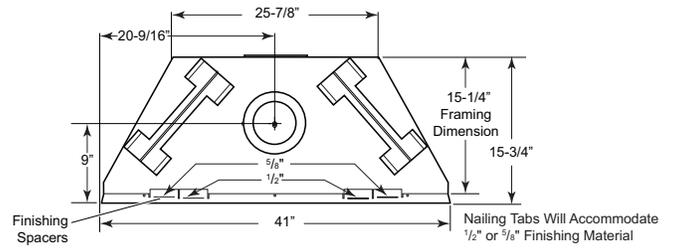


TOP VIEW

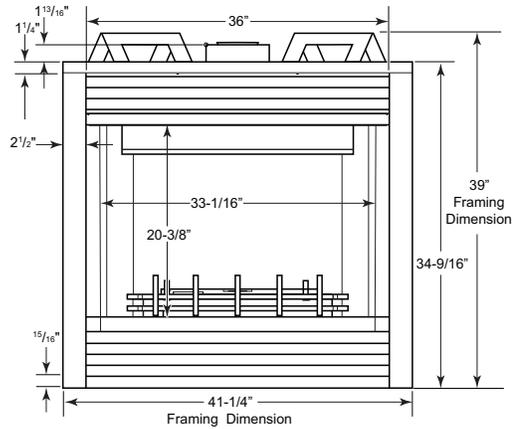

FRONT VIEW

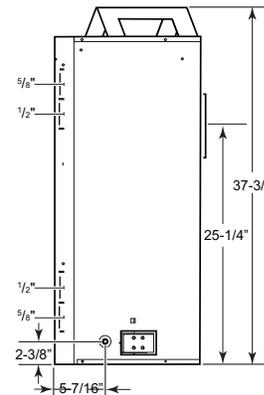

SIDE VIEW

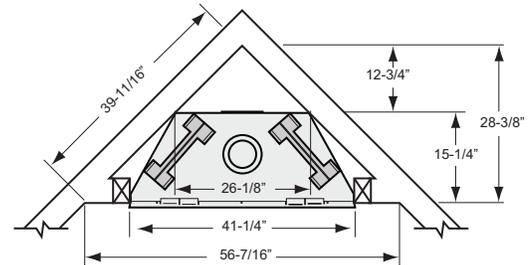

CORNER INSTALLATION



A Brand of Monessen Hearth Systems Co.
 149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com

