

PRODUCT SPECIFICATIONS

CDVR47(7) and CDVT47(7) Direct Vent Systems



GLASS VIEWING AREA

39-1/16" W x 20-3/8" H (795 Square Inches)


TECHNICAL INFORMATION

- Max. Btu Input: 24,000 BTU/HR
- Ignition System: Standing Pilot or Electronic
- Gas Type: Natural or LP
- Flue Type: 4" x 7" Twist-Lock*
- Termination: Rear Vent or Top Vent models
- Clearance to Flue for Interior: 3" Top, 1" Bottom and Sides**
- Clearance to Flue for Outside Wall: 1"
- Clearance to Fireplace: Zero Clearance
- CSA Design Certified


FIELD INSTALLED ACCESSORIES

- Louvers: Polished Brass, Pewter
- Curved Trim: Brass, Pewter, Black
- Medium Trim Kit: Brass, Pewter, Black
- Variable Thermostat Controlled Forced Air Blower 160 cfm) - BLOT
- Tavern Brown firebrick (FBCD(R/T)47TB)
- Natural Gas Conversion Kit (CDV47CKN)
- LP Gas Conversion Kit (CDV47CKP)
- Mesh Glass Cover
- Ambient Technologies™ Remote Controls and Thermostats
- Wood Cabinet Surrounds
- Designer Facings
- Current 600DVB trim and facing accessories will fit this unit.


* Simpson Dura-Vent is approved for Top Vent Applications with (MSPA) Adapter.
 ** If vertical rise is 7-1/2 feet or higher when in top vent configuration only (CDVT), the vent clearance to combustibles is 1" on all sides of the horizontal run.

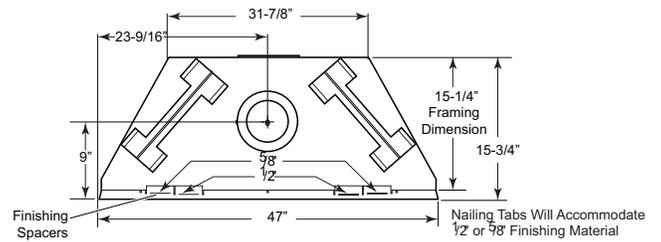


TOP VIEW

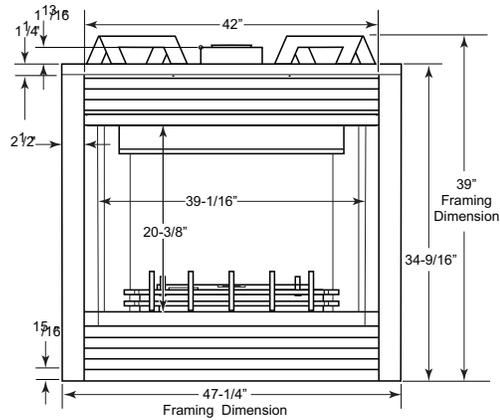

FRONT VIEW

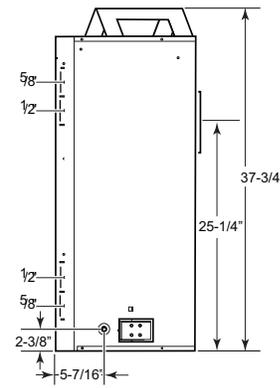

SIDE VIEW

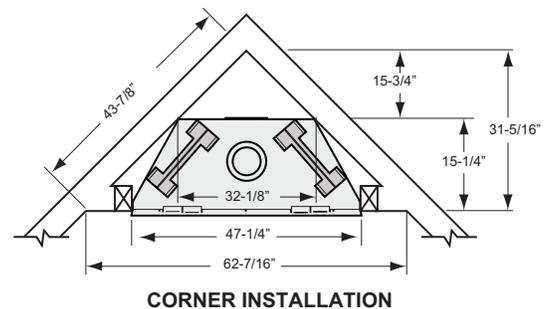

CORNER INSTALLATION



A Brand of Monessen Hearth Systems Co.
 149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. 04/09