



UL 127 Certified

## 42" Woodburning Fireplace

- Mosaic Masonry™Technology
- Full Masonry Design
- Full Length Nailing Flanges

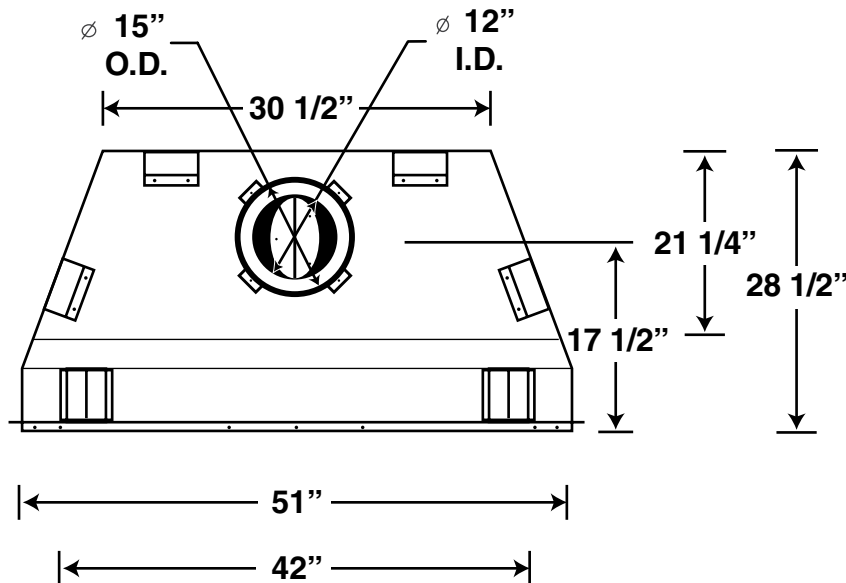


Vent Size	12"
Min. Pipe Clearance	2"
Min. System Height	16'
- w/ Single Offset	16'
- w/ Two Offsets	22' 0"
Max. Dist. Between Elbows	6' 0"
Max. System Height	50' 0"

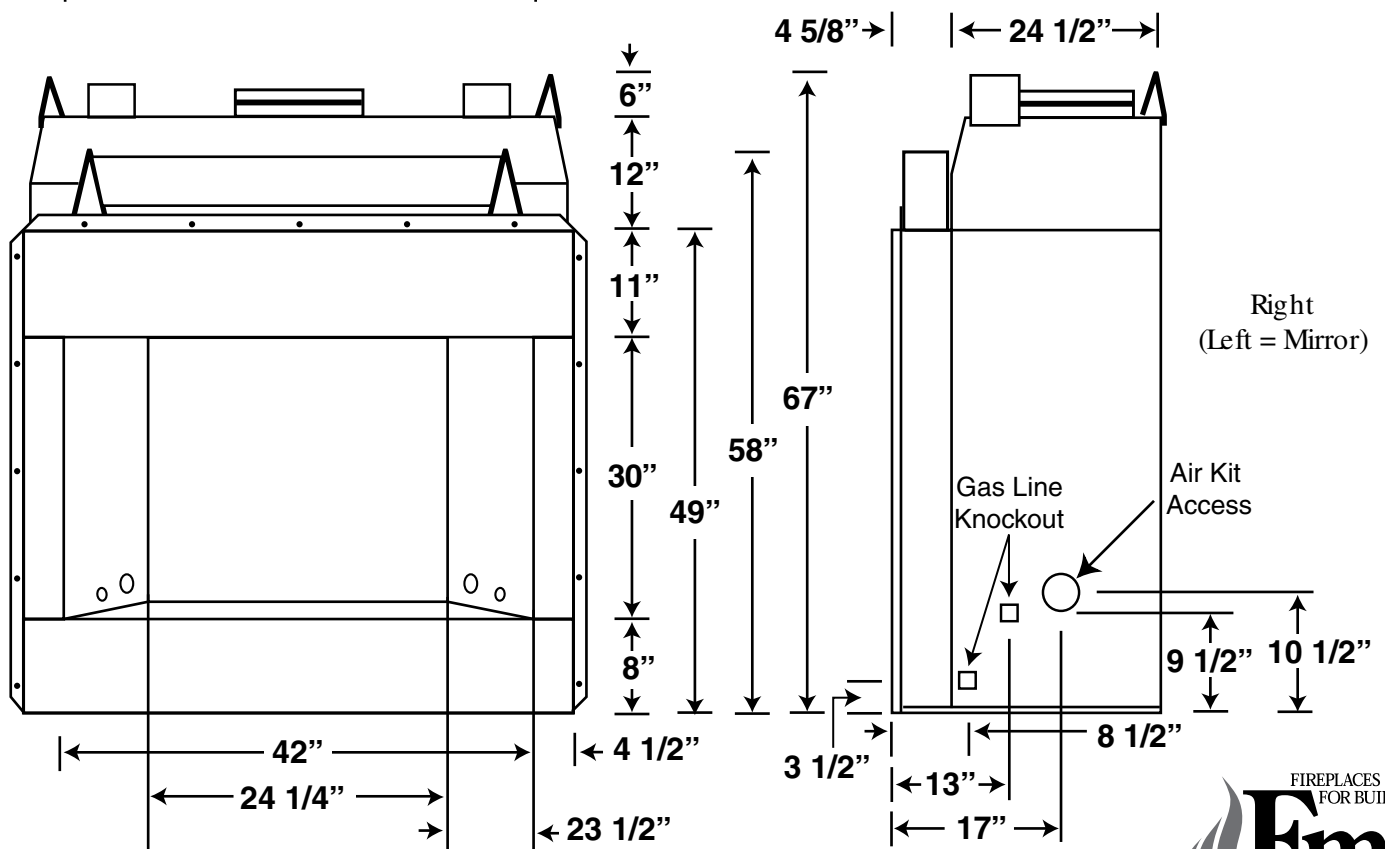



# Georgian Masonry

## 42" Woodburning Fireplace

### Framing Dimensions

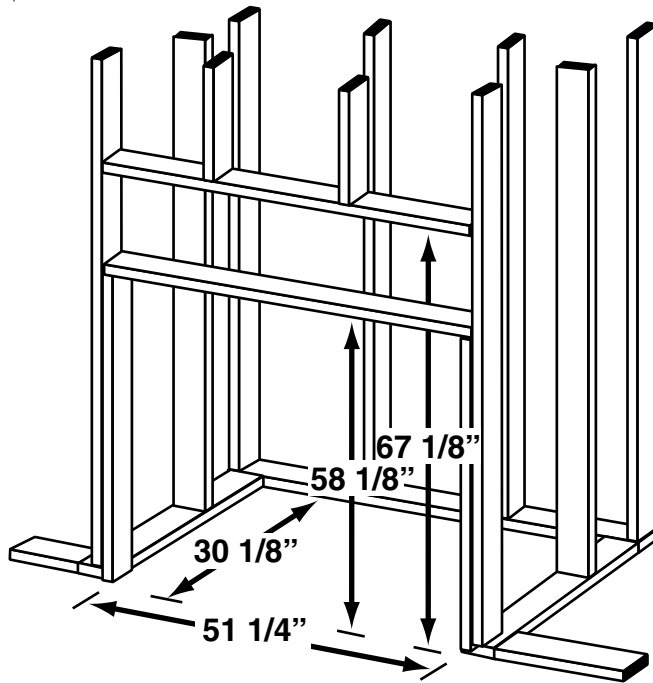

Pitch	Slope	Opening "A" Max.
Flat	0°	19.5"
0-6/12	26.6°	22"
6/12-12/12	45.0°	27"

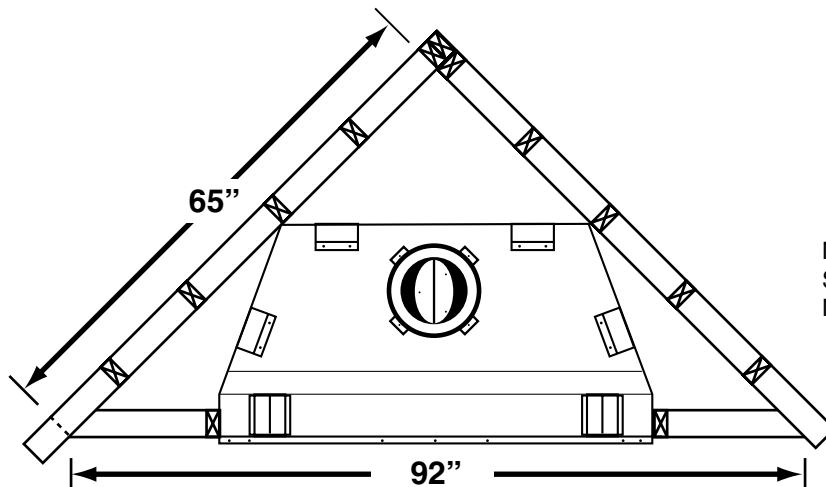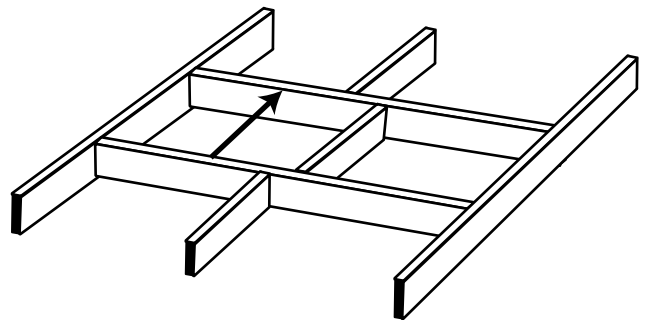

Maintain 1 1/2" Clearance at  
Sides and Back of Fireplace  
Not Required at Nailing Flange

#### NOTE:

A Hearth Extension Projecting a Minimum of 20" in Front of, and 12" Beyond Each Side of the Fireplace Opening is Required to Protect Combustible Floor Construction in Front Of the Fireplace. See Installation Instructions for Complete Information

#### NOTE:

Built-in Features Such as Mantels, Bookshelves, etc. Made of Combustible Materials Must Maintain Minimum Clearances from the Fireplace. See Installation Instructions for Complete Information

"Product design, features and specifications are subject to change at any time. Refer to current product instructions prior to installation."